


NANO-QM770


EPIC SBC Supports Socket G2 for Intel® 22nm Mobile CPU, DVI-I/Dual HDMI/LVDS, Dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s and Audio

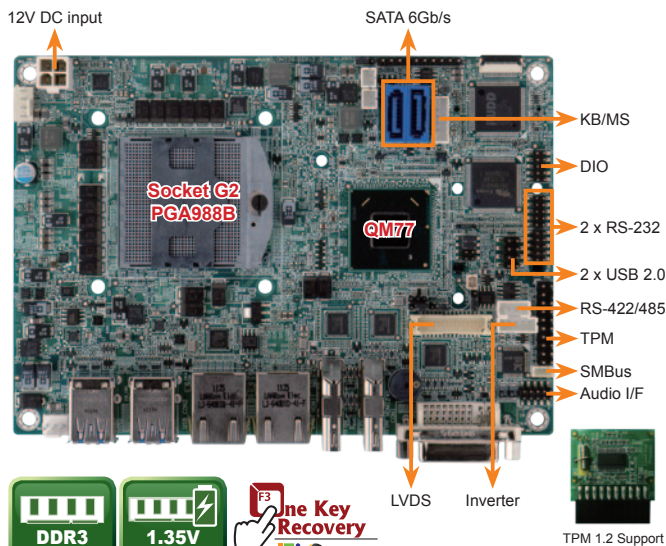

Specifications

- ◆ CPU
 - Socket G2 for 3rd generation 22nm Intel® mobile processor
- ◆ PCH
 - Intel® QM77
- ◆ BIOS
 - UEFI BIOS
- ◆ Memory
 - One 204-pin 1600/1333 MHz single-channel DDR3 & DDR3L SDRAM unbuffered SO-DIMM slot supports up to 8 GB
- ◆ Graphics
 - Intel® HD Graphics Gen 7 with 12 execution units
 - DirectX 11, OpenGL 3.1, OpenCL 1.1
- ◆ Display Output
 - Analog CRT and DVI by DVI-I connector (up to 2048x1536@75Hz)
 - 18/24-bit dual-channel LVDS (up to 1920x1200@60Hz)
 - Dual HDMI (up to 1920x1200@60Hz)
- ◆ Ethernet
 - LAN1: Intel® 82583V PCIe controller
 - LAN2: Intel® 82579 PHY with Intel® AMT 8.0 support
- ◆ Super I/O
 - Fintek F81866
- ◆ External I/O Interface
 - 4 x USB 3.0
- ◆ Internal I/O Interface
 - 1 x KB/MS (1x6 pin)
 - 1 x RS-422/485 (1x4 pin, P=2.0)
 - 2 x RS-232 (2x5 pin, P=2.0)
 - 2 x SATA 6Gb/s with 5V SATA power connector (RAID 0,1 supported)
- ◆ TPM
 - 1 x TPM connector (2x10 pin)
- ◆ Audio
 - Realtek ALC662 HD codec
- ◆ Expansions
 - 1 x Full-size PCIe Mini card slot (supports mSATA)
- ◆ Watchdog Timer
 - Software programmable supports 1~255 sec. system reset
- ◆ Programmable I/O
 - 8-bit digital I/O
- ◆ Fan Connector
 - 1 x CPU smart fan (1x4 pin)
 - 1 x System smart fan (1x3 pin)
- ◆ Power Supply
 - 12V only DC input
 - 1 x Internal power connector (2x2 pin)
 - Support AT/ATX mode
- ◆ Power Consumption
 - 12V@4.89A (Intel® 1.8GHz CPU with one 1333 MHz 4 GB DDR3 SO-DIMM)
- ◆ Operating Temperature
 - 10°C ~ 60°C
- ◆ Storage Temperature
 - 20°C ~ 70°C
- ◆ Operating Humidity
 - 5% ~ 95%, non-condensing
- ◆ Dimensions
 - 115 mm x 165 mm
- ◆ Weight
 - GW: 850g/NW: 350g


Triple independent display supported under Win7 OS

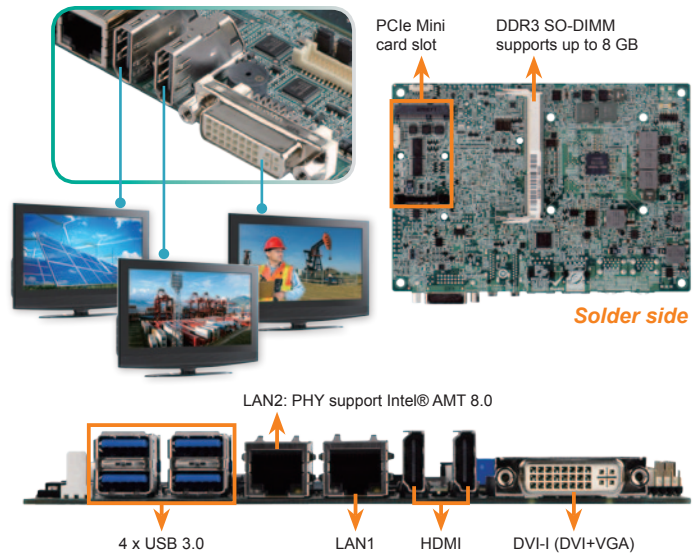

Features

- EPIC SBC with Socket G2 for Intel® 22nm mobile processor
- Triple independent display supports with dual HDMI+DVI/dual HDMI+LVDS (HDMI V1.3a compliant)
- 1066/1333/1600 MHz DDR3 SDRAM supports up to 8 GB
- Supports three COM, four USB 3.0, two SATA 6Gb/s and audio
- Intel® GbE LAN with Intel® AMT 8.0 supported
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Dimensions (Unit: mm)

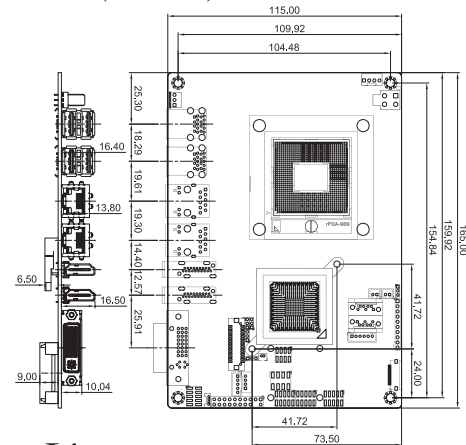

Packing List

1 x NANO-QM770 single board computer		
1 x Audio cable	1 x Mini jumper pack	
1 x Power cable	1 x One Key Recovery CD	
2 x RS-232 cable	1 x QIG (Quick Installation Guide)	
2 x SATA with power cable kit	1 x Utility CD	

Ordering Information

Part No.	Description
NANO-QM770-R10	EPIC SBC supports Socket G2 for Intel® 22nm mobile CPU, DVI-I/dual HDMI/LVDS, dual PCIe GbE, USB 3.0, PCIe Mini, SATA 6Gb/s and Audio
32000-023800-RS	PS/2 KB/MS cable, 135mm, P=2.0
32000-044300-RS	Dual port USB cable, 210mm, P=2.54
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0
CF-989A-RS-R12	CPU cooler for mobile socket-G (PGA988) up to 55W processor, copper, 60 x 60 x 27.6mm, RoHS
TPM-IN01-R11	20-pin Infineon TPM module, software management tool, firmware v3.17